

P19H38N5.25

Scroll Compressor


40 Years of Scroll Technology



Certified to
ISO 9001:2008



Precisely Right.

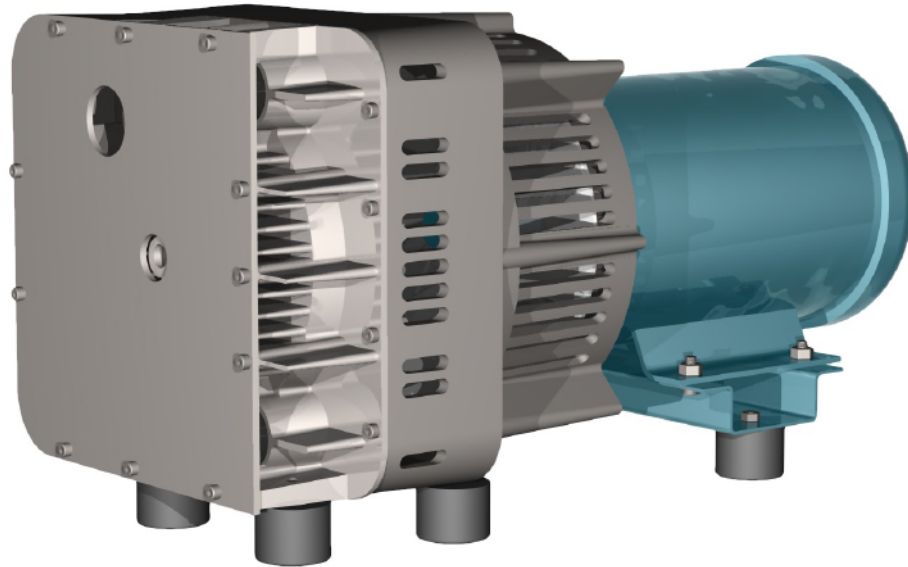

Technical Overview

	US	Europe
Max. Pressure	120 psig	8.27 barg
Max. Flow	18 cfm	510 lpm
Rated Power	6 hp	4.48 kW
Motor Type	AC	
Avg. Sound Level	65 dB(A)	
Ambient Temp.	0°F - 104°F	-20°C - 40°C
Model Number	P19H38N5.25	
Part Number	100320	

Product Features

- 100% Oil-Free
- Low Sound Levels
- Balanced, Smooth, Rotary Motion
- High Efficiency
- Long Product Life
- Continuous Duty
- Minimal Pulsation
- Field Serviceable
- Integrated Fan For Cooling

The information presented in this material is based on technical data and test results of nominal units. It is believed to be accurate and reliable. Air Squared, Inc. does not warrant, guarantee, or assume liability in connection with this information.


Application conditions may adversely affect performance and product life. It is the responsibility of the user to determine the suitability of the product for intended use. Contact info@airsquared.com for custom design information or application specific requirements.




P19H38N5.25

Performance (U.S., Metric)

Flow Characteristics

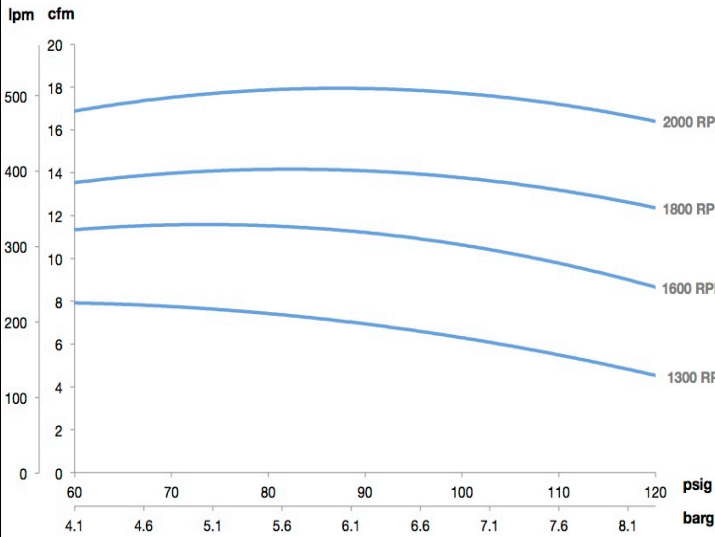


Power Consumption

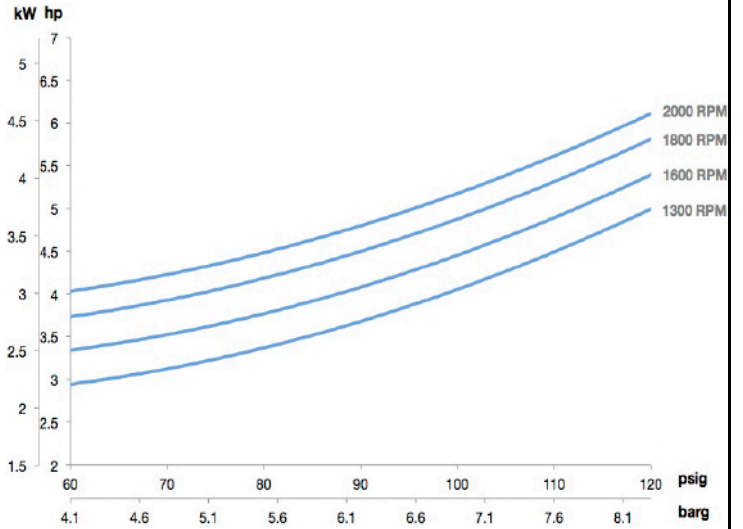

Data reflects volumetric flow measurements at standard atmospheric conditions and electrical power consumption with standard AC motor.

Dimensions (mm)

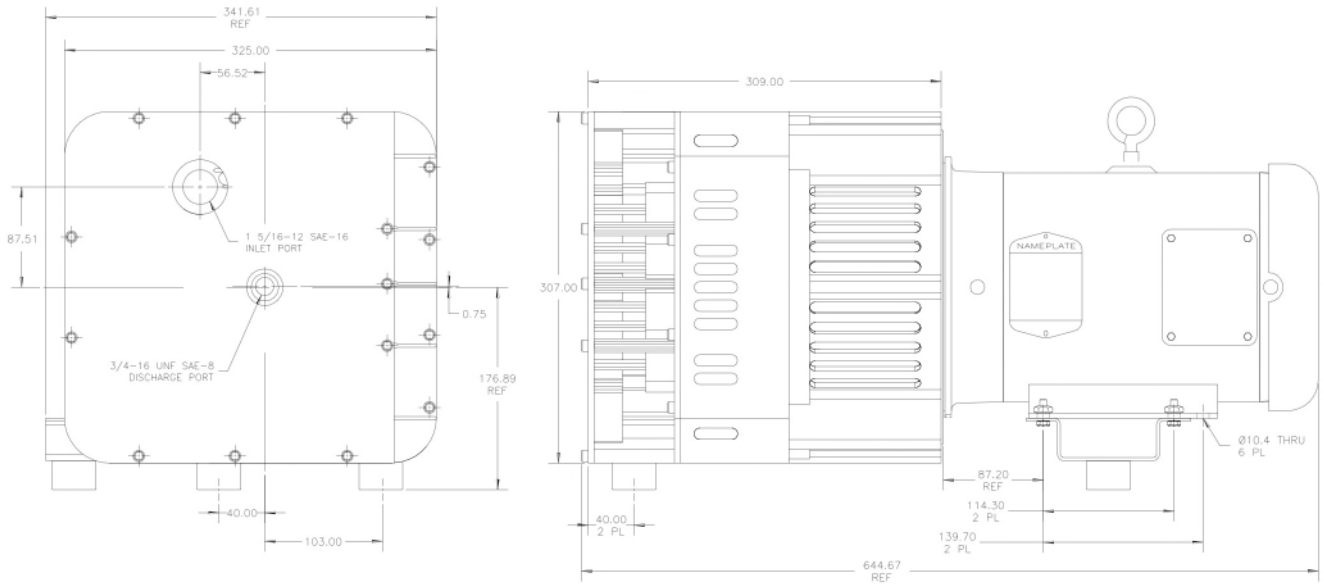

Notes

- Custom configurations may be available. Contact info@airsquared.com for more information.



**Air Squared
Manufacturing, Inc.**

3001 Industrial Lane #3
Broomfield, CO 80020 USA
P: (303) 466-2669
F: (303) 466-4425
<http://airsquared.com>